MP3 Player

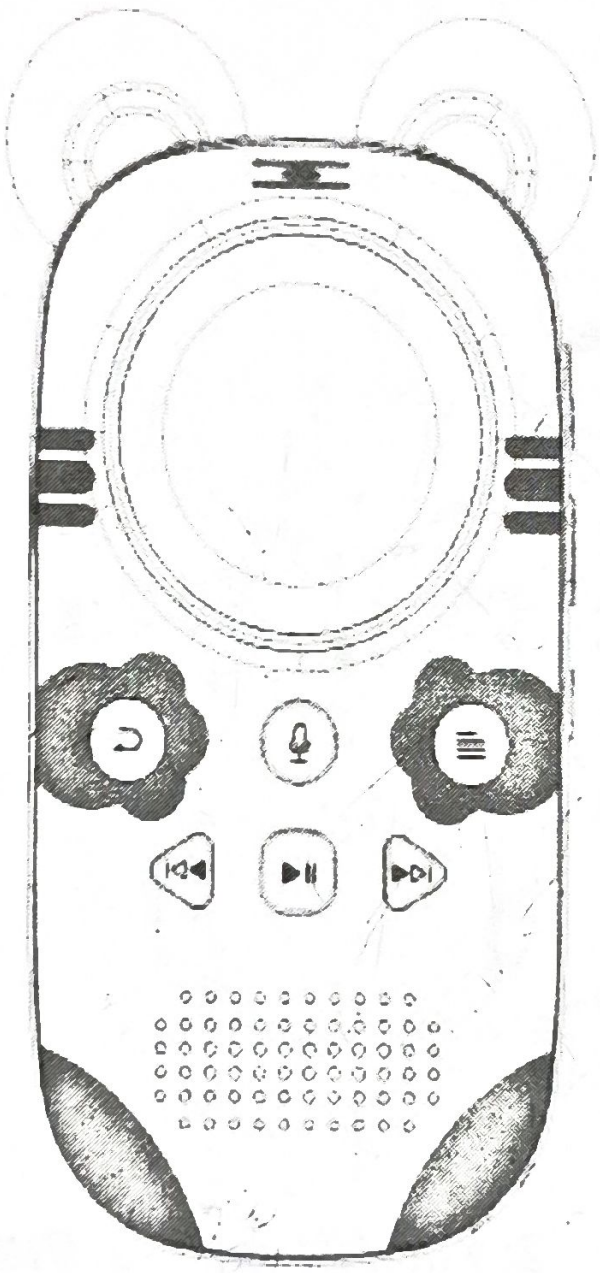

User Manual -PGE 1

ユーザーマニュアル-PGE 8

Download User Manual-PGE 13

ダウンロードマニュアル-PGE 13

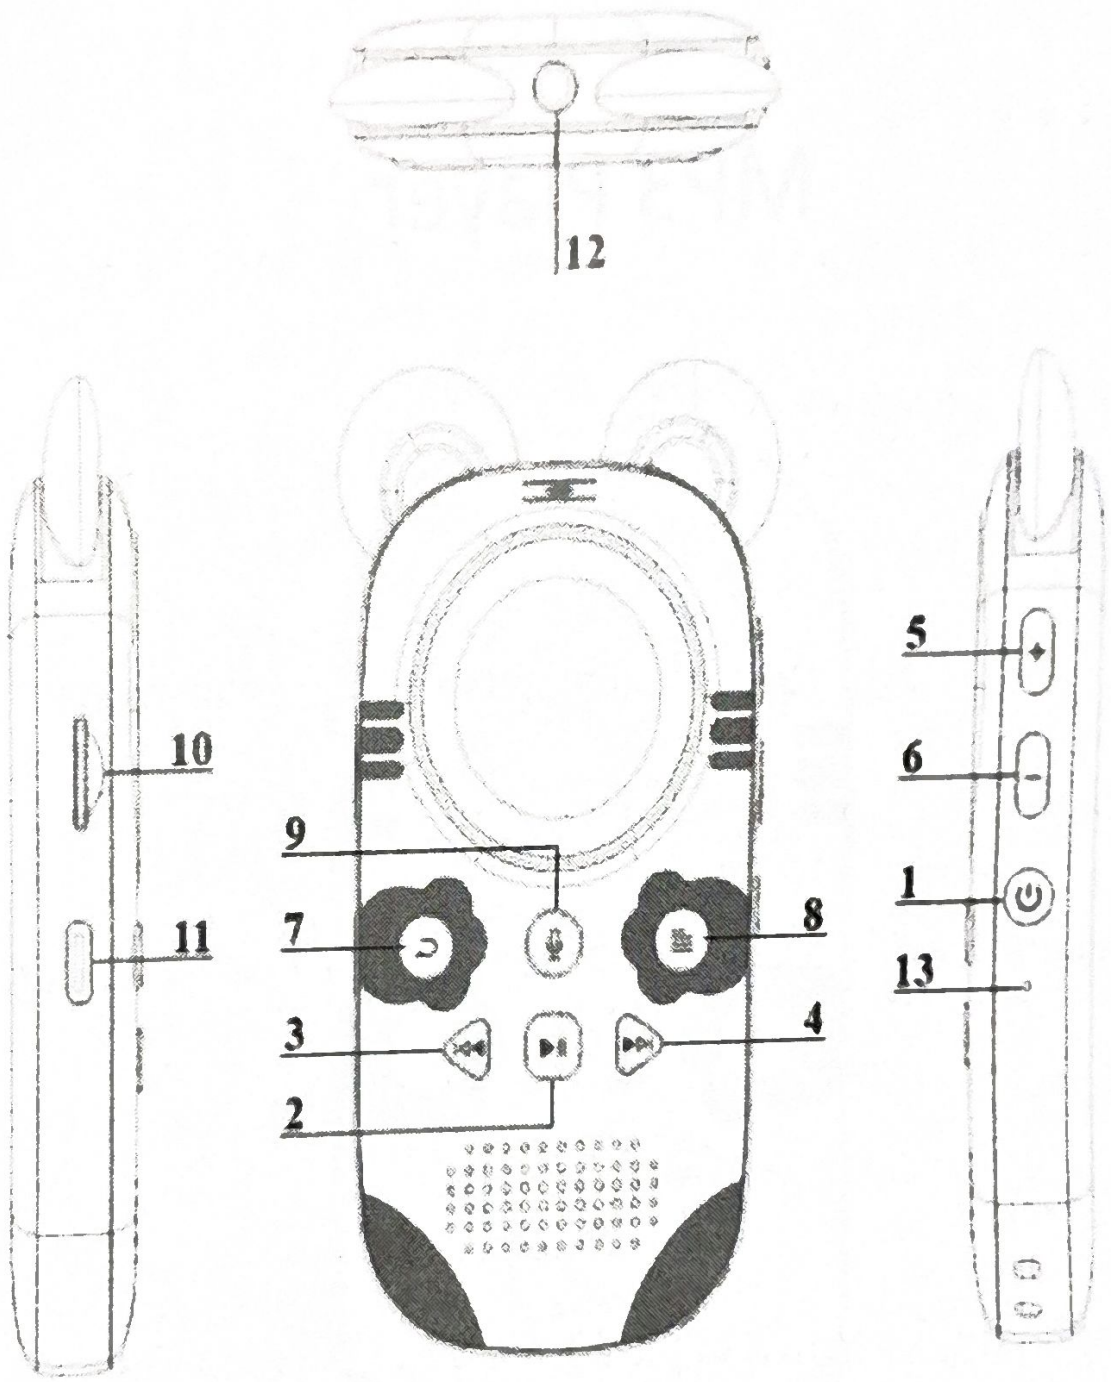

1: Power on/off 2: Play/Pause 3: Previous Song

4: Next Song 5: Volume + 6 : Volume -

7: Return 8: Menu 9: Record

10: TF Port 11: USB Port 12: Earphone Port

13: Reset

Basic Operation

• Power On/Off Button

Press and hold the power button for 3s to turn on/off the MP3. When the MP3 is on, short press to lock/unlock the screen.

• Menu Button

In the music playing interface, short press to enter into the sub-menu.

•Return Button

In any playing interface, short press to return to the previous menu, long press to return to the main interface.

•Play/Pause Button

Short press in the playing interface to play/pause. In the setting interface, confirm to save function.

• Previous/Next Song Button

Short press in the playing interface to go to the previous song/next song. And long press for fast forward or fast backward operation.

• Recording Button

Press and hold in any interface to start recording.

- **Volume +/-**

Short press or long press to adjust the volume

Function description

- **Main interface**

Short press ⏮ and ⏭ to select function, short press ⏯ to enter.

- **Music**

Select the music function, press ⏯ to enter all music sub-menu, press

⏮ ⏭ to select the music sub-menu.

- **Play/Pause**

In the music playing interface, short press ⏯ to play/pause.

- **Fast Forward/Backward**

Long press the button ⏮ ⏭ to fast forward/fast backward.

- **Switch Tracks**

Short press ⏮ ⏭ to the previous song and the next song.

•Music Play Setting Interface

In the music playing interface, short press the menu button to enter into the sub-menu, the related list is as follow.

※Return to the main interface, Play mode, sound settings, add to playlist, Remove from the playlist, delete, Bookmarks

•Return key

Short press in any interface(Except for screen protector) to return to the previous menu, long press to return to the main interface.

•Bluetooth Connection

In the main interface, select Bluetooth and short press ⏯ to enter the Bluetooth function. The related menu is as follow.

A.Bluetooth on/off: Turn on/off Bluetooth function

B. Search for device: Select the Bluetooth device around, then select the Bluetooth device and pair

•Folder

In the main interface, short press ⏯ to enter the folder

•Setting

Short press ⏯ in the main interface to enter the setting interface. The related menu is as follow.

A. Language: 28 kinds of language for setting in total

B. Display settings: Brightness, Screensaver, Backlight time

C. Power Off: Off, Set power off time

D. Sleep timer: 1, 2, 3, 5, 10 Minute / Off

E. Speaker Switch: Turn on/off speaker

F. Date and time: Set date and time

G. Information: Player info and disk info

H. Format device: Format internal memory, Format SD card

I. Factory Settings: Restore factory setting

•Start Recording

select recording in the main interface state, select start voice recording, short press ⏯ to start recording.

•End of Recording

Short press the return key ↩ in the recording interface, choose yes/no to save/un-save the recording

•Play the Recording

Select the recording library in the recording sub-menu, short press the to enter the recording library, then select the recording file and short press the to play.

•Recording Settings

Select the recording format/recording bit rate, etc. in the recording sub-menu, press button ⏯ to select, and short press the button ⏮ ⏭ to confirm and save.

How to transfer music to this mp3 player from computer

1. Download music to computer PC

2. Connect the mp3 player to computer via the USB data cable

3. After the mp3 player is recognized by computer, copy the music file these downloaded from computer to the mp3 player and paste the music file to the mp3 player. The mp3 player just like a U disk.

Specification:

Support Micro SD	Up to 128GB
Bluetooth 5.0	10m Connection Distance without Obstacles
Battery	Lithium Polymer Battery 750mAh
USB Connection	USB 2.0 Type C
Audio Formats	MP3/WMA
Recorder Formats	WAV/ MP3
	3 Meters Recording Distance
Charging	Input: AC110-240V 50/60Hz Max: 100mA Output: DC 5V, 500mA-1A, about 2H Full Charge